



ITALIAN STAGE

The new budget brand for sound systems products, has been created out of the vast experience that Proel has in this field.

The use of the most advanced Research and Development processes, normally reserved for much higher end products, efficient and strictly controlled quality assurance, as well as a proven track record in ODM projects are just some of the elements characterizing the "budget/quality" mission of Italian Stage. A business opportunity to capture a market position with highly competitive, inherently reliable products without direct competitive comparison but at a similar price range.



MIXERS

The new Italian Stage 2MIX is small format mixers' series offering everything the musician or the simple enthusiast need, as well as a clear and powerful sound thanks to the use of low noise preamps. Equipped with a complete feature set, the 2MIX

IS 2MIX3UB



CONTICUENT CONTICUENT

Compact Design

1 MIC IN, 1 LINE IN, 1 Stereo IN

Integrated ECHO effects

Integrated USB 2 + 2 Interface

Integrated Bluetooth



IS 2MIX4FXU





1 Master Fader
3 Channel Fader
2 MIC IN, 1 STEREO LINE IN
Integrated DSP Multi FX REVERB processor
Phantom 48 V
Low Cut Filter
Integrated USB Player / Recorder / Interface

Integrated Bluetooth





series offers Bluetooth audio streaming, as well as USB recording and playback. Equipped with a digital DSP Multi FX REVERB processor, the Italian Stage 2MIX lineup also works as a 2 + 2 channel USB audio interface for DAW recording / playback. The 4, 6 and

8 channel models also include USB audio with an integrated recorder / player able to record MP3 files directly on USB flash drives. You can play MP3 files as backing tracks, or play background music during live breaks.

IS 2MIX6FXU






1 Master Fader
5 Channel Fader
2 MIC IN, 1 STEREO LINE IN
Integrated DSP Multi FX REVERB processor
Phantom 48 V
Low Cut Filter
Integrated USB Player / Recorder / Interface
Integrated Bluetooth



IS 2MIX8PRO











LOUDSPEAKERS

IS SPX08A



Description	8" bi-active two way plastic speaker
Woofer	8" VC 1,5"
Driver	1" VC 1"
Line output	XLR OUT + 1/4" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + ¼" JACK IN
Rms power	AB class 120 + 30 W
Peak power	300W
Frequency response	60hz-20khz
Peak spl	123 dB
Power supply	AC110V/AC230V





B t. et	12// 12
Description	12" bi-active two way plastic speaker
Woofer	12" VC 2"
Driver	1" VC 1"
Line output	XLR OUT + 1/4" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + 1/4" JACK IN
Rms power	AB class 170 + 30 W
Peak power	400W
Frequency response	48hz-20khz
Peak spl	127 dB
Power supply	AC110V/AC230V

ls SPX10A



Description	10" bi-active two way plastic speaker
Woofer	10" VC 1,5"
Driver	1" VC 1"
Line output	XLR OUT + ¼" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + 1/4" JACK IN
Rms power	AB class 120 + 30 W
Peak power	300W
Frequency response	55hz-20khz
Peak spl	125 dB
Power supply	AC110V/AC230V





Description	15" bi-active two way plastic speaker
Woofer	15" VC 2,5"
Driver	1" VC 1"
Line output	XLR OUT + ¼" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + ¼" JACK IN
Rms power	AB class 170 + 30 W
Peak power	400W
Frequency response	45hz-20khz
Peak spl	130 dB
Power supply	AC110V/AC230V

® IS SPX08AUB





W Wireless Audio System



Multimedia player	Usb Flash Drive, Sd Memory Card, Stereo Bluetooth Device, Remote Control
Description	8" bi-active two way plastic speaker
Woofer	8" VC 1,5"
Driver	1" VC 1"
Line output	XLR OUT + 1/4" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + 1/4" JACK IN
Rms power	AB class 120 + 30 W
Peak power	300W
Frequency response	60hz-20khz
Peak spl	123 dB
Power supply	AC110V/AC230V

Multimedia player	Usb Flash Drive, Sd Memory Card, Stereo Bluetooth Device, Remote Control
Description	10" bi-active two way plastic speaker
Woofer	10" VC 1,5"
Driver	1" VC 1"
Line output	XLR OUT + 1/4" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + 1/4" JACK IN
Rms power	AB class 120 + 30 W
Peak power	300W
Frequency response	55hz-20khz
Peak spl	125 dB
Power supply	AC110V/AC230V





® IS SPX15AUB



W Wireless Audio System



Multimedia player	Usb Flash Drive, Sd Memory Card, Stereo Bluetooth Device, Remote Control
Description	12" bi-active two way plastic speaker
Woofer	12" VC 2"
Driver	1" VC 1"
Line output	XLR OUT + 1/4" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + 1/4" JACK IN
Rms power	AB class 170 + 30 W
Peak power	400W
Frequency response	48hz-20khz
Peak spl	127 dB
Power supply	AC110V/AC230V

Multimedia player	Usb Flash Drive, Sd Memory Card, Stereo Bluetooth Device, Remote Control
Description	15" bi-active two way plastic speaker
Woofer	15" VC 2,5"
Driver	1" VC 1"
Line output	XLR OUT + 1/4" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + 1/4" JACK IN
Rms power	AB class 170 + 30 W
Peak power	400W
Frequency response	45hz-20khz
Peak spl	130 dB
Power supply	AC110V/AC230V

LOUDSPEAKERS

IS X212AUB

IS X215AUB



W Wireless Audio System



Multimedia player	Usb Flash Drive, Sd Memory Card, Bluetooth Device, Remote Control
Woofer	12" VC 2"
Driver	1" VC 34 mm
Line output	XLR OUT + ¼" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + 1/4" JACK IN
Rms power	AB class 350 + 50 W
Peak power	800W
Frequency response	48hz-20khz
Peak spl	129 dB
Power supply	AC110V/AC230V

Multimedia player	Usb Flash Drive, Sd Memory Card, Bluetooth Device, Remote Control
Woofer	15" VC 2,5"
Driver	1" VC 34 mm
Line output	XLR OUT + 1/4" JACK OUT
Line input	XLR IN + 2 x RCA
Mic input	XLR IN + 1/4" JACK IN
Rms power	AB class 350 + 50 W
Peak power	800W
Frequency response	45hz-20khz
Peak spl	131 dB
Power supply	AC110V/AC230V



SUBWOOFERS



IS S115A





Description	12"WOODEN SUBWOOFER, 2 CHANNELS INPUT&OUTPUT
Woofer	12"
RMS Power	350W CLASS AB Amplifier
Peak power	700W
Frequency response	40Hz-120Hz
Peak spl	126 dB
Power supply	AC110V/AC230V

Description	15" WOODEN SUBWOOFER, 2 CHANNELS INPUT&OUTPUT
Woofer	15"
RMS Power	350W CLASS AB Amplifier
Peak power	700W
Frequency response	20Hz-120Hz
Peak spl	128 dB
Power supply	AC110V/AC230V

IS S118A



Description	18"WOODEN SUBWOOFER, 2 CHANNELS INPUT&OUTPUT
Woofer	18"
RMS Power	350W CLASS AB Amplifier
Peak power	700W
Frequency response	20Hz-120Hz
Peak spl	129 dB
Power supply	AC110V/AC230V

PORTABLE SYSTEMS

IS FRX08AW











Description	8" portable speaker with battery, MP3 player, SD card, USB, Stereo Bluetooth, 1 VHF wireless microphone, remote control
Woofer	8"
Horn driver	1"
RMS Power	30W Class D Amplifier
Peak power	60W
Sensitivity 1W/1m	88dB
Frequency response	50hz-18khz
Power supply	AC110V/AC230V

Description	10" portable speaker with battery, MP3 player, SD card, USB, Stereo Bluetooth, 1 VHF wireless microphone, remote control
Woofer	10"
Horn driver	1"
RMS Power	50W Class D Amplifier
Peak power	100W
Sensitivity 1W/1m	90dB
Frequency response	40Hz-18kHz
Power supply	AC110V/AC230V

ls FR12AWV2

Description	12" portable speaker with battery, MP3 player, SD card, USB, Stereo Bluetooth, 2 x UHF wireless microphone (863 - 865 Mhz), remote control
Woofer	12"
Horn driver	1"
RMS Power	100W Class D Amplifier
Peak power	200W
Sensitivity 1W/1m	92dB
Frequency response	40hz-18khz
EQ	5 band Graphic EQ
Power supply	AC110V/AC230V



COVERS



IS COVERFRX08

Protection cover for SPX08A - SPX08AUB - FRX08AW

IS COVERFRX 10
Protection cover for SPX10A - SPX10AUB - FRX10AW

№ IS COVERSPX12

Protection cover for SPX12A - SPX12AUB

IS COVERSPX15

Protection cover for SPX15A - SPX15AUB




IS COVERS112
Protection cover for S112A

IS COVERS115
Protection cover for S115A

IS COVERS118

Protection cover for S118A

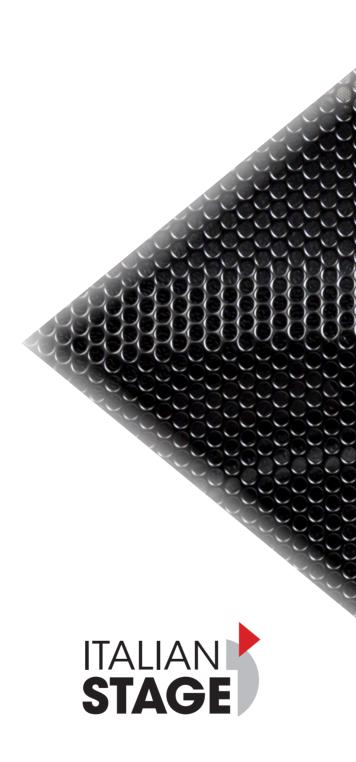

is a brand of

PROEL SPA

(Worldwide Headquarters)
Via alla Ruenia, 37/43
64027 Sant'Omero (TE) - ITALY
Tel. +39 0861 81241
Fax +39 0861 887862
P.I. 00778590679
N.Reg.AEE IT 08020000002762

IS CAT21IE